


eBOX671-521-FL

Fanless Embedded System with LGA1151 9th/8th Gen Intel® Core™ i7/i5/i3 or Celeron® Processor, 4-CH PoE, and MXM 3.1 Type A

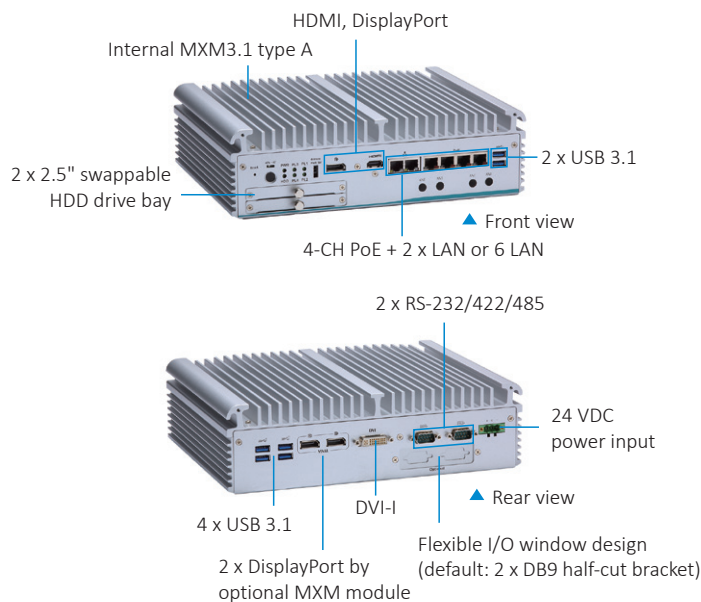

Features

- 9th/8th gen Intel® Core™ i7/i5/i3 or Celeron® processor with Intel® Q370 chipset (Coffee Lake/Coffee Lake Refresh-S)
- 4-CH PoE (IEEE802.3at compliance)
- Dual swappable 2.5" SATA HDD drive bays with RAID 0 & 1
- Supports MXM 3.1 type A graphics module (optional)
- DVI-I, HDMI, and DisplayPort with triple-view supported
- ECC memory supported by optional Intel® C246 (Intel® Core™ i3 or Celeron® processor)



Specifications

Standard Color	Silver
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU	LGA1151 9th gen Intel® Core™ i7/i5/i3 or Celeron® processor (35W) LGA1151 8th gen Intel® Core™ i7/i5/i3 or Celeron® processor (35W/65W)
System Memory	2 x 260-pin DDR4-2666 SO-DIMM, up to 64GB (ECC supported by Intel® C246 PCH)
Chipset	Intel® Q370 or Intel® C246 PCH (optional)
BIOS	AMI
System I/O Outlet	2 x RS-232/422/485 2 x DisplayPort via optional MXM kit 1 x HDMI, 1 x DisplayPort, 1 x DVI-I 4 x Power over Ethernet (IEEE802.3at), up to 60W 2 x 10/100/1000 Mbps Ethernet (Intel® I210-IT & I219-LM) 2 x USB 3.1 Gen2, 4 x USB 3.1 Gen1 1 x Phoenix type VDC power input connector 1 x AT/ATX quick switch 1 x ATX power switch 1 x Reset switch connector 1 x Remote switch 1 x Flexible I/O window (Default: 2 x DB9 half-cut bracket) 4 x SMA-type antenna connector
Watchdog Timer	255 levels, 1 to 255 sec.
Storage	2 x 2.5" HDD drive bay (up to 9.5 mm height) 1 x mSATA (enabled in BIOS setting)
Expansion Interface	2 x Full-size PCI Express Mini Card slot (USB + PCIe signal) 2 x SIM slot 1 x MXM3.1 type A connector
TPM	TPM 2.0
System Indicator	1 x Green LED for system power-on 1 x Green LED for HDD active 4 x Green LED for programmable
Power Input	24 VDC

Specifications

Operating Temperature	Without MXM module: -40°C to +60°C (-40°F to +140°F) (with W.T. DRAM & SSD, CPU TDP 35W) -40°C to +50°C (-40°F to +122°F) (with W.T. DRAM & SSD, CPU TDP 65W) With MXM module: -40°C to +50°C (-40°F to +122°F) (with W.T. DRAM & SSD & MXM kit, CPU TDP 35W)
Humidity	10% - 90%, non-condensing
Shock Vibration	IEC 60068-2-27 (w/ SSD: 50G, half-sine, 11 ms duration)
Vibration Endurance	IEC 60068-2-64 (w/ SSD: 3Grms STD, random, 5- 500 Hz, 1 hr/axis)
Dimensions	280 mm (11.02") (W) x 210 mm (8.26") (D) x 80.5 mm (3.16") (H)
Weight (net/gross)	4.8 kg (10.58 lb)/5.6 kg (12.34 lb)
Certifications	CE, FCC Class A, UKCA
EOS Support	Win 10 IoT, Win 11 IoT, Linux

* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

Packing List

1 x Screw pack
4 x Foot pad
1 x 3-pin terminal block connector
1 x Remote power switch cable

Power Protection

DC Version

OVP (over voltage protection)
UVP (under voltage protection)
OCP (over current protection)
SCP (short circuit protection)
Reverse protection

Ordering Information

Standard

eBOX671-521-FL-DC-4PoE (P/N: E36K671105)	Fanless embedded system with LGA1151 9th/8th gen Intel® Core™ i7/i5/i3 or Celeron® processor, Intel® Q370, DVI-I, HDMI, dual HDD, 4 PoE, 2 GbE LAN, 6 USB, 2 COM, and 24 VDC (PoE version, no MXM module supported)
eBOX671-521-FL-DC-6GbE (P/N: E36K671106)	Fanless embedded system with LGA1151 9th/8th gen Intel® Core™ i7/i5/i3 or Celeron® processor, Intel® Q370, DVI-I, HDMI, dual HDD, 6 GbE LAN, 6 USB, 2 COM, and 24 VDC (MXM T1000 supported)

Optional

2.5" SATA HDD	80GB or above
2.5" SATA SSD	100GB or above
DDR4 SO-DIMM	8GB to 32GB
mSATA	64GB or above
8816K6718A0E	Wall mount kit
886K671A0A0E	DIN-rail kit
	Wi-Fi/LTE module
886K67111A0E	W.T. MXM M3T1000-PN-A module
886K67110A0E	MXM M3T1000-PN module
509000001500	24V 120W power adapter
	Power cord
E392903102	AX92903 CANbus PCI Express Mini module
E392902103	AX92902 LAN PCI Express Mini module
590000048500	RS-232 cable, L=200 mm for COM3/4
592000000100	DIO cable for optional 1 x 8-CH DIO (4-in/4-out)
E392905103	AX92905 Audio PCI Express Mini module
E392918103	AX92918 Dual LAN PCI Express Mini module

* Specifications and certifications may vary based on different requirements.

Dimensions

